


Technical Data:					
	Basket Size [Ø/mm/kg]	Rotational Speed [min-1]	Heating Capacity [kVA]	Voltage [V/Hz]	Measurements W x D x H [mm]
TZ 30	220/180/10	500-1400	1,3	230/50	475 x 630 x 915
TZ 100	430/280/50	300-1000	3	400/50	670 x 900 x 1035
TZ 400	400/450/50	360	12	400/50	1245 x 1880 x 1330



Deburring - Rounding - Grinding - Smoothing - Polishing

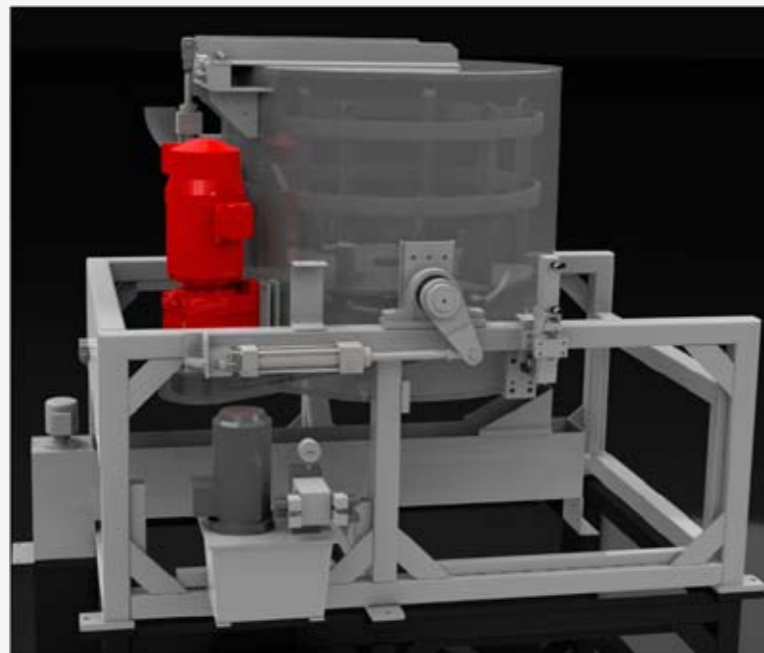

Centrifugal dryer
for spotless drying of workpieces after vibratory finishing

Centrifugal Dryer TZ 30 and TZ 100

for drying bulk goods

- No attachment on the floor required
- Case made of durable coated steel and service cover on the front side
- With lid of stainless steel
- Rotor for the accommodation of baskets
- Time preset via timer
- Adjustable rotation speed
- Thermostatic regulation of temperature
- Electronic standstill surveillance
- Safety lock of centrifuge lid
- Start simply by closing the lid
- Automatic opening of the lid after the drying time
- Loading and unloading aids optionally available




Bulk materials as well as sensitive parts can be dried in the centrifugal dryer

Centrifugal Dryer TZ 400

for drying bulk goods, especially for sensitive workpieces

- Centrifugal housing swivel-mounted
- Centrifugal lid pneumatically actuated
- Balance control via digital vibration monitor
- Drain freely downwards into a collection container made of standard steel incl. pump
- Rotary drive via geared motor
- Electric heating with channel blower
- Process time and programs are variable adjustable at the control cabinet

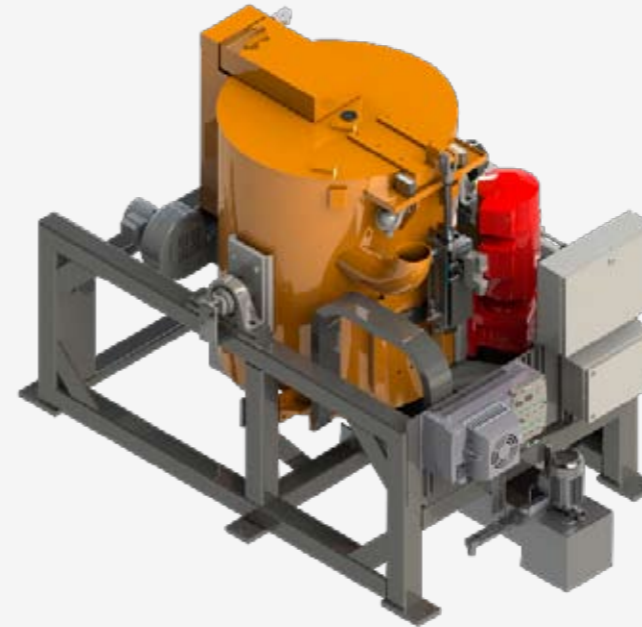

Special versions of baskets, sieves and adapter on request